


Chemical Transfer Haulers



RELIANCE

The word "RELIANCE" is written in a bold, blue, sans-serif font. A blue hose with a black connector is integrated into the letter "R", looping around it and extending downwards.

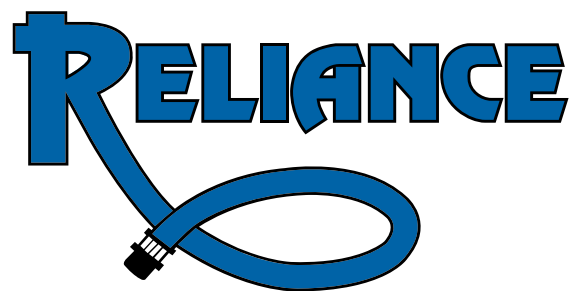

ContiTech

Viper™

- For the transfer of a variety of industrial chemicals used today and for use in pressure, gravity flow and/or suction service
- Hose may be cleaned using open-end steam up to 50 psi or in a bath containing 10% Sodium Hydroxide (NaOH), up to 212°F (100°C)
- Tube: Beige Alphasyn® Modified Cross-Linked Polyethylene (Modified XLPE)
- Cover: Black Omegasyn™ abrasion-resistant EPDM with white spiral stripe
- Reinforcement: Spiral-plyed synthetic fabric with double wire helix
- Temperature Range: -40°F to 250°F (-40°C to 121°C)

End Connections
Camlocks
Threaded King Nipples

Hose I.D.		Hose O.D.		Max. Operating Pressure		Vacuum HG		Min. Bend Radius		Weight	
mm	inches	mm	inches	MPa	psi	mm	inches	mm	inches	kg/m	lbs/ft
25.4	1	36.9	1.45	1.38	200	737	29	100	4	0.79	0.53
50.8	2	64.5	2.54	1.38	200	737	29	175	7	1.73	1.16
76.2	3	91.2	3.59	1.38	200	737	29	250	10	2.71	1.82
101.6	4	117.8	4.64	1.38	200	737	29	350	14	3.61	2.42



ContiTech

Fabchem® Chemical Transfer Hose

- A significant improvement to our chemical hose line. It handles the majority of common industrial chemicals in pressure, gravity flow, and suction service
- Tube: Pliosyn® Ultra-High Molecular Weight Polyethylene
- Cover: Green Versigard™ synthetic rubber with bright orange longitudinal stripe, corrugated (wrapped impression)
- Reinforcement: Spiral-plyed synthetic fabric with double wire helix
- Temperature: -40°F to 150°F (-40°C to 66°C)

End Connections
Camlocks
Threaded King Nipples
Crimp Ferrules

Part No.	Hose I.D.		Hose O.D.		Max. Operating Pressure		Vacuum HG		Min. Bend Radius		Weight	
	mm	inches	mm	inches	MPa	psi	mm	inches	mm	inches	kg/m	lbs/ft
FABCHEM-16	25.4	1	37.30	1.47	1.38	200	737	29	102	4	0.89	0.6
FABCHEM-24	38.10	1.5	50	1.97	1.38	200	737	29	127	5	1.25	0.84
FABCHEM-32	50.8	2	64.80	2.55	1.38	200	737	29	152	6	1.82	1.22
FABCHEM-48	76.20	3	92.20	3.63	1.38	200	737	29	229	9	3.14	2.11
FABCHEM-64	101.60	4	118.60	4.67	1.38	200	737	29	254	10	4.18	2.81



BUCHANAN RUBBER LTD.




Chemical

- The cross-linked polyethylene tube makes this one of the most versatile types of hose available to the chemical industry today. It will handle 90% of common chemical and petroleum products in both suction and discharge applications
- Cover: Green smooth chemical resistant EPDM rubber
- Reinforcement: High tensile wire helix embedded between layers of textile cords
- Tube: Smooth chemical resistant (XLPE) cross-linked polyethylene
- Temperature: -29°C to +120°C (-20°F to +248°F)

End Connections
Camlocks
Threaded King Nipples

Part No.	Hose I.D.		Hose O.D.		Max. Operating Pressure		Vacuum HG		Min.Bend Radius		Weight	
	mm	inches	mm	inches	MPa	psi	mm	inches	mm	inches	kg/m	lbs/ft
CHX-100	25.4	1	38.10	1.5	1.37	200	737	29	203	8	0.76	0.51



949 Chemiflex Composite Hose

- For low-pressure transfer applications in over-the-road vehicles, storage tank and rail car loading and unloading
- Designed for use where light weight and flexibility are essential
- Typical applications: Tank-to-process chemicals handling, storage tank transfer and batching, drumming, manifolding, blending, etc., rail car and tank truck loading and delivery
- Temperature Range: -22°F(-30°C) to +212°F(+ 100°C)

End Connections
Camlocks
Threaded King Nipples

Part No.	Hose I.D.		Hose O.D.		Max. Operating Pressure		Min.Bend Radius		Weight	
	mm	inches	mm	inches	MPa	psi	mm	inches	kg/m	lbs/ft
949-COMP-32	50	2	50	2	1.4	200	175	7	1.8	1.2
949-COMP-48	75	3	88	3.5	1.4	200	200	8	2.9	1.9
949-COMP-64	100	4	115	4.5	1.05	150	300	12	4.1	2.7

CUSTOM VEHICLE GRAPHICS



RELIANCE

SIGN SHOP



Powering Business Worldwide



Reliance is *your* Eaton *Platinum* Distributor

More Locations to Serve You Better

Head Office (Nisku AB)

606 - 19 Avenue
Nisku, AB T9E 7W1
Tel: 780.955.7115
Fax: 780.955.7121

Brooks

Bay 3 & 4, 515 – 1st Ave East
Brooks, AB T1R 0H1
Tel: 403.362.4562
Fax: 403.362.4486

Calgary

#129-7007 54 St. SE
Calgary, AB T2C 3C2
Tel: 403.720.0767
Fax: 403.720.8719

Clairmont

8301 98 Street
Clairmont, AB T0H 0W0
Tel: 780.532.4673
Fax: 780.532.4370

Dawson Creek

2612 92 Avenue
Dawson Creek, BC V1G 4G7
Tel: 250.782.1172
Fax: 250.782.1173

Edson

4637 3 Avenue
Edson, AB T7E 1C2
Tel: 780.723.5927
Fax: 780.723.5714

Grande Prairie

11450 98 Avenue
Grande Prairie, AB T8V 7P4
Tel: 780.532.4702
Fax: 780.539.5510

Lloydminster

5801 63 Avenue
Lloydminster, AB T9V 3C3
Tel: 780.872.5635
Fax: 780.872.5634

Redcliff

#1, 123 Lockwood St. NE
Redcliff, AB T0J 2P0
Tel: 403.548.7230
Fax: 403.548.7251

Red Deer

#110, 7660 76 St. Close
Red Deer, AB T4P 4G6
Tel: 403.309.6729
Fax: 403.309.6780

Greeley

2030 E. – 8 St., Suite B
Greeley, CO 80631
Tel: 970.346.3751
Fax: 970.353.3168

Houston

4115 Kreinhop Road
Suite 124
Spring, TX 77388
Tel: 281.288.9720

Midland

2904 S County Road 1250
Midland, TX 79706-2639
Tel: 432.689.0102
Fax: 432.699.4898

San Antonio

4327 Centergate St.
San Antonio, TX 78217
Tel: 210.650.3636
Fax: 210.650.3133

Shreveport

1001 M and O Drive
Bossier City, LA 71111
Tel: 318.687.5486
Fax: 318.687.5491


Williston

4970 Highway 85
Williston, ND 58801
Tel: 701.572.7035
Fax: 701.572.70300

Reliance Design and Manufacturing: 780.955.3080 | **Reliance Hydraulic Services:** 780.955.2042

Reliance Safety Supply and Service: 780.955.7115 | **Reliance Commercial Sign Printing:** 780.955.7115

Servco Oilfield Supply: 780.955.7444

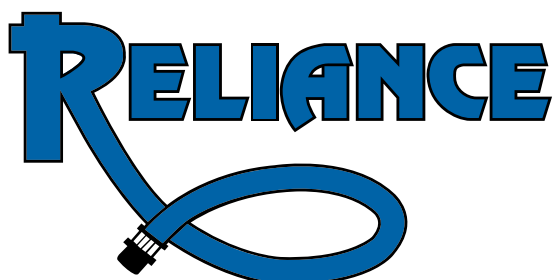

Toll Free: 1 877 955 7115

www.relianceindustrial.com