



Goodyear Arctic Ortac

This product is a low temperature hose and is used for air, water, oil, kerosene, fuel oil, and some chemical operations where temperatures fall as low as -65°F (-54°C).

Temperature Range: -65°F to 180°F (-54°C to 82°C)

Nom. ID		Nom OD		Weight		Max WP	
in.	mm.	in.	mm	lb/ft	kg/m	psi	Mpa
1/4	6.35	0.63	16.00	0.14	0.21	300	2.07
3/8	9.53	0.75	19.05	0.19	0.28	300	2.07
1/2	12.70	0.91	23.11	0.25	0.37	300	2.07
3/4	19.05	1.18	29.97	0.36	0.54	300	2.07
1	25.40	1.50	38.10	0.58	0.86	300	2.07
1-1/4	31.75	1.80	45.72	0.74	1.10	300	2.07
1-1/2	38.10	2.09	53.09	1.00	1.49	300	2.07

End Connections



Fittings (Global TTC Crimp)

- Male NPT
- Female JIC, 45, 90
- O Ring Face Seal
- Male ORB



Goodyear Aggie Gas

This product is a multi-use type hose for dispensing gasoline, grease, kerosene and petroleum oils from farm and barrel type pumps. It is for agricultural, construction and industrial service where UL approval is not required.

Temperature Range: -30°F to 140°F (-34°C to 60°C)

Nom. ID		Nom OD		Weight	
in.	mm.	in.	mm	lb/ft	kg/m
3/4	19.05	1.08	27.43	0.27	0.40
1	25.40	1.40	35.56	0.52	0.77

End Connections

Camlocks

All configurations in brass and aluminum

King Nipples

NPT Threaded End

Dry Disconnects & Fuel Nozzles

Dry Disconnects



Available in Aluminum with Buna, Viton, Teflon, or EPDM seals

Maxi-Dry Adapter



Size	Part #
1-1/2	MD15A
2	MD20A
3	MD30A

Maxi-Dry Coupler



Size	Part#
1-1/2	MD15D
2	MD20D
3	MD30D


Fuel Nozzles



Standard Utility Nozzles

Automatic Shut-off

Bulk Delivery

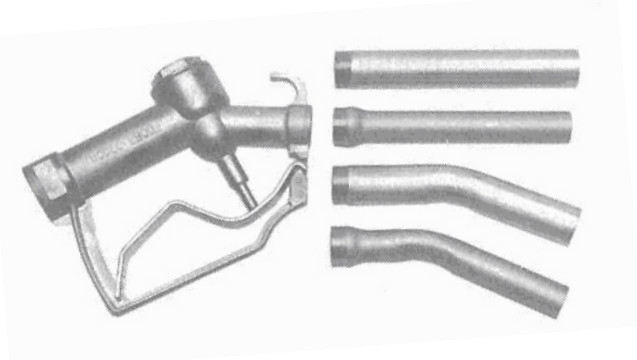

Inlet x Spout Size	Part #
1 x 1 outlet	900
1 x 1 straight	900B
1 x 1 bent	900S
1 x 3/4 straight	900W34S
1 x 3/4 bent	900W34B
3/4 x 3/4 straight	900S34
3/4 x 3/4 bent	900B34

Inlet X Spout Size	Part #
1-1/4 x 1-1/4	1144D
1-1/2 x 1-1/2	1124D

Inlet X Outlet	Part #
1-1/4 x 1-1/4 Spout	114D
1-1/4 x 1-1/4 FNPT	114DNS
1-1/2 x 1-1/2 Spout	112D
1-1/2 x 1-1/2 FNPT	112DNS